

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT				1. CONTRACT ID CODE J		PAGE OF PAGES 1 4	
2. AMENDMENT/MODIFICATION NO. 0003		3. EFFECTIVE DATE 17-Jun-2004		4. REQUISITION/PURCHASE REQ. NO.		5. PROJECT NO.(If applicable)	
6. ISSUED BY AFGHANISTAN ENGINEER DISTRICT US ARMY CORPS OF ENGINEERS KABUL APO AE 09356		CODE W917PM		7. ADMINISTERED BY (If other than item 6) See Item 6		CODE	
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. W917PM-04-R-0004	
				X		9B. DATED (SEE ITEM 11) 19-May-2004	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input checked="" type="checkbox"/> is extended, <input type="checkbox"/> is not extended. Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning <u>2</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.							
A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D. OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) Effective with this amendment the time and date set for receipt of offers is extended as follows: Sealed offers in original and 2 copies to perform the work required are due at the place previously specified by 4:00 PM Afghanistan time 1 July 2004. The specifications and drawings are revised as described on the continuation pages.							
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
				TEL: _____ EMAIL: _____			
15B. CONTRACTOR/OFFEROR _____ (Signature of person authorized to sign)		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA BY _____ (Signature of Contracting Officer)		16C. DATE SIGNED 17-Jun-2004	

SECTION SF 30 BLOCK 14 CONTINUATION PAGE

SUMMARY OF CHANGES

(End of Summary of Changes)

The following items are applicable to this modification:

CHANGES IN PLANS AND SPECS

SPECIFICATION SECTION 01010, SCOPE OF WORK

1. In paragraph 2.6, **DELETE** the entire paragraph, and **REPLACE** with: Not Used
2. In paragraph 2.7, **DELETE** the entire paragraph, and **REPLACE** with: Not Used
3. In paragraph 2.8, **DELETE** the entire paragraph, and **REPLACE** with: Not Used
4. In paragraph 2.10, **DELETE** the entire paragraph, and **REPLACE** with: Secure the several propane tanks located outside behind the kitchen area of Building C by adding security bars and gate(s) to the propane tank storage area.
5. In paragraph 3.50, **DELETE** the entire paragraph.
6. In paragraph 5.1, **DELETE** the entire paragraph, and **REPLACE** with: **Bid Schedule Item 0002-Operating Room and Delivery Room Floor refinishing.** Install WearTop or equivalent floor sealer and wearing surface in the five operating rooms and delivery rooms in Building A. The floor covering shall thoroughly seal the floor and the baseboard, to a wall height of 150 mm above the floor. Reference Section 169992 for additional installation guidance.
7. In paragraph 5.0 Optional Bid Scope of Work, **ADD:**

5.3 Bid Schedule Item 0004-Install lead shielding in X-ray room on first floor of building B. Install lead shielding to the height of 2.4 meters with sheet lead 6 mm thick on the x-ray room walls. Lead shielding should also be installed on the door and door frame and covered with plaster upon completion.
8. In paragraph 5.0 Optional Bid Scope of Work, **ADD:**

5.4 Bid Schedule Item 0005-Replace ER door with sliding door. Replace existing Emergency Room door that leads to outside of Building A with a sliding door. The opening should have a width large enough to support patients in wheelchairs or gurneys.
9. In paragraph 5.0 Optional Bid Scope of Work, **ADD:**

5.5 Bid Schedule Item 0006-Install AC split packs in the two pharmaceutical storage rooms on the first floor of Building B. The wiring for the AC split pack unit shall meet international standards for grounding, and the AC

split pack units shall meet international standards for fresh air exchange. The operating noise level shall not exceed 45 decibels.

10. In paragraph 5.0 Optional Bid Scope of Work, **ADD:**

5.6 Bid Schedule Item 0006-Construct two partition walls, floor to ceiling, with a door to provide an extra room on the first floor of Building A. This room shall be constructed parallel to the Post Delivery Room across from the Locker Room.

11. In paragraph 5.0 Optional Bid Scope of Work, **ADD:**

5.7 Bid Schedule Item 0007-Construct partitions in the area between the top of two doorways to the ceiling in the halls on both floors of Building A. These are specifically two doorways located toward the western end of the building. Glass shall be used in this construction, similar to existing glass enclosures above doorways.

12. In paragraph 6.2.3.2, **ADD:**

All existing floor drains shall be cleaned and repaired to full operation. Floors that do not drain properly shall be sloped for positive drainage. Drainage is critical in OR and delivery rooms. Where drains are absent in these rooms the contractor shall install new drains with positive drainage and connecting to existing adjacent drain lines.

SPECIFICATION SECTION 169991, TECHNICAL REQUIREMENTS

1. In paragraph 3.5.3, **DELETE** the reference to: 3.6 SOLID WASTE MANAGEMENT AND DISPOSAL.

2. **DELETE** the following paragraphs and **Replace** with "Not Used":

- 3.6.1 General
- 3.6.2 Dumpsters and Pads
- 3.6.3 Medical and Hazardous Waste

3. In paragraph 4.9.5, **DELETE** the paragraph and **Replace** with "Not Used".

SPECIFICATION SECTION 00835, SUBMITTAL PROCEDURES FOR DESIGN-BUILD PROJECT

1. **DELETE** all references to "Section 1015." And **REPLACE** with "Section 169991."

SPECIFICATION SECTION 169992, FLOOR COVERING AND SEALER

1. In Part 1 General under Installation Methods, **ADD** a fourth paragraph stating: Submittal of floor surfacing sample is required for approval by the Contracting Officer before installation of surface flooring and sealer.

SPECIFICATION SECTION 169993, SPECIAL CONSTRUCTION – X-RAY SHIELDING

1. **ADD** “Specification Section 169993, Special Construction – X-ray Shielding” to solicitation.

ATTACHMENTS


1. ATTACHMENTS: The following drawings are attached thereto and made a part hereof:

RBH FLOOR PLAN (AMENDED) – Autocad Version


RBH FLOOR PLAN (AMENDED) – PDF Version

2. Specification Section 169993, Special Construction – X-ray Shielding


BUILDING B
SECOND FLOOR

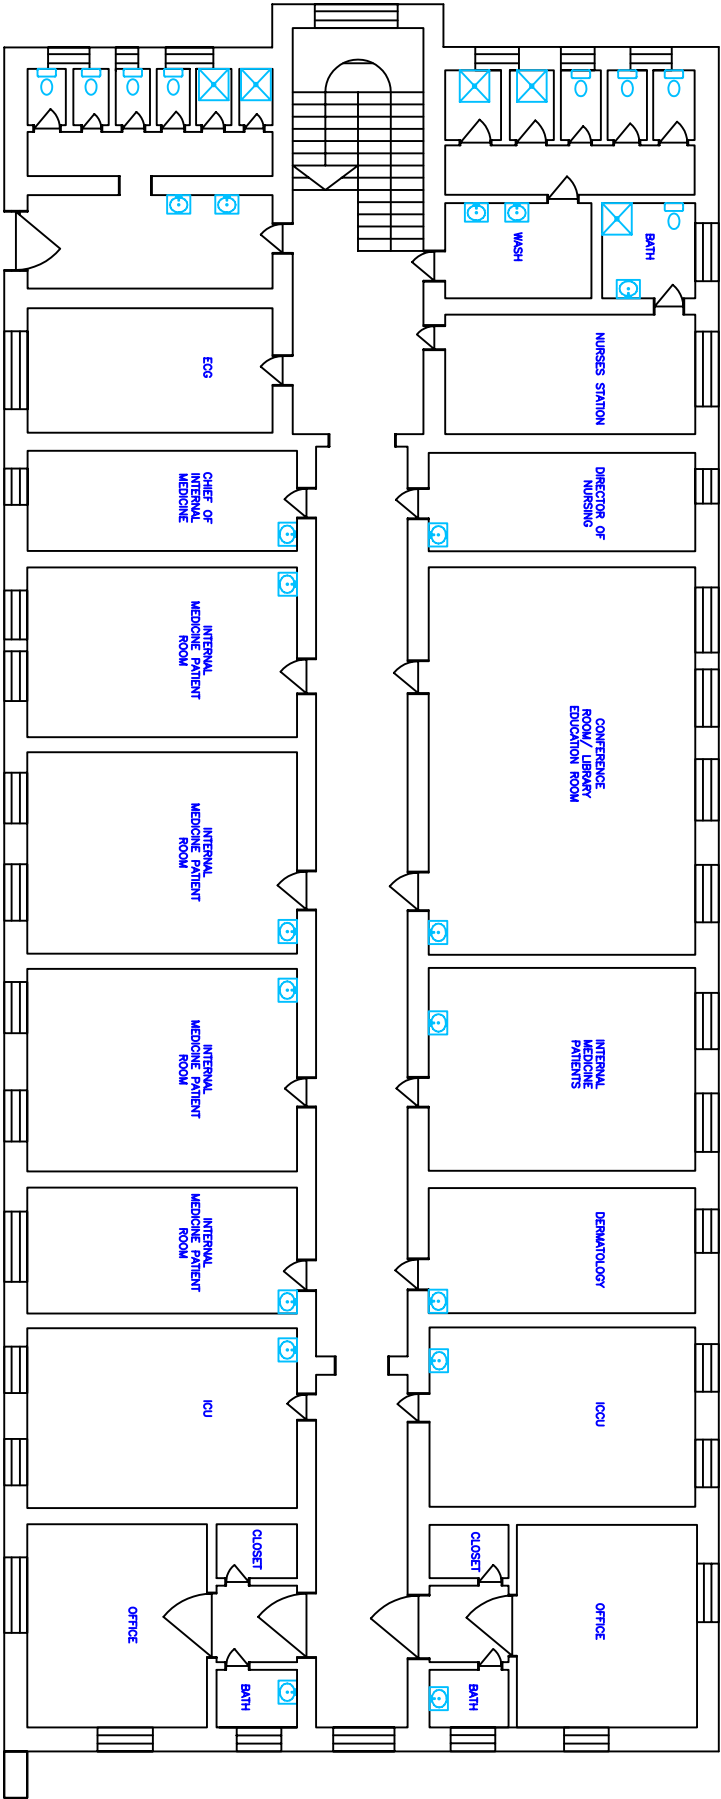

BUILDING B
FIRST FLOOR

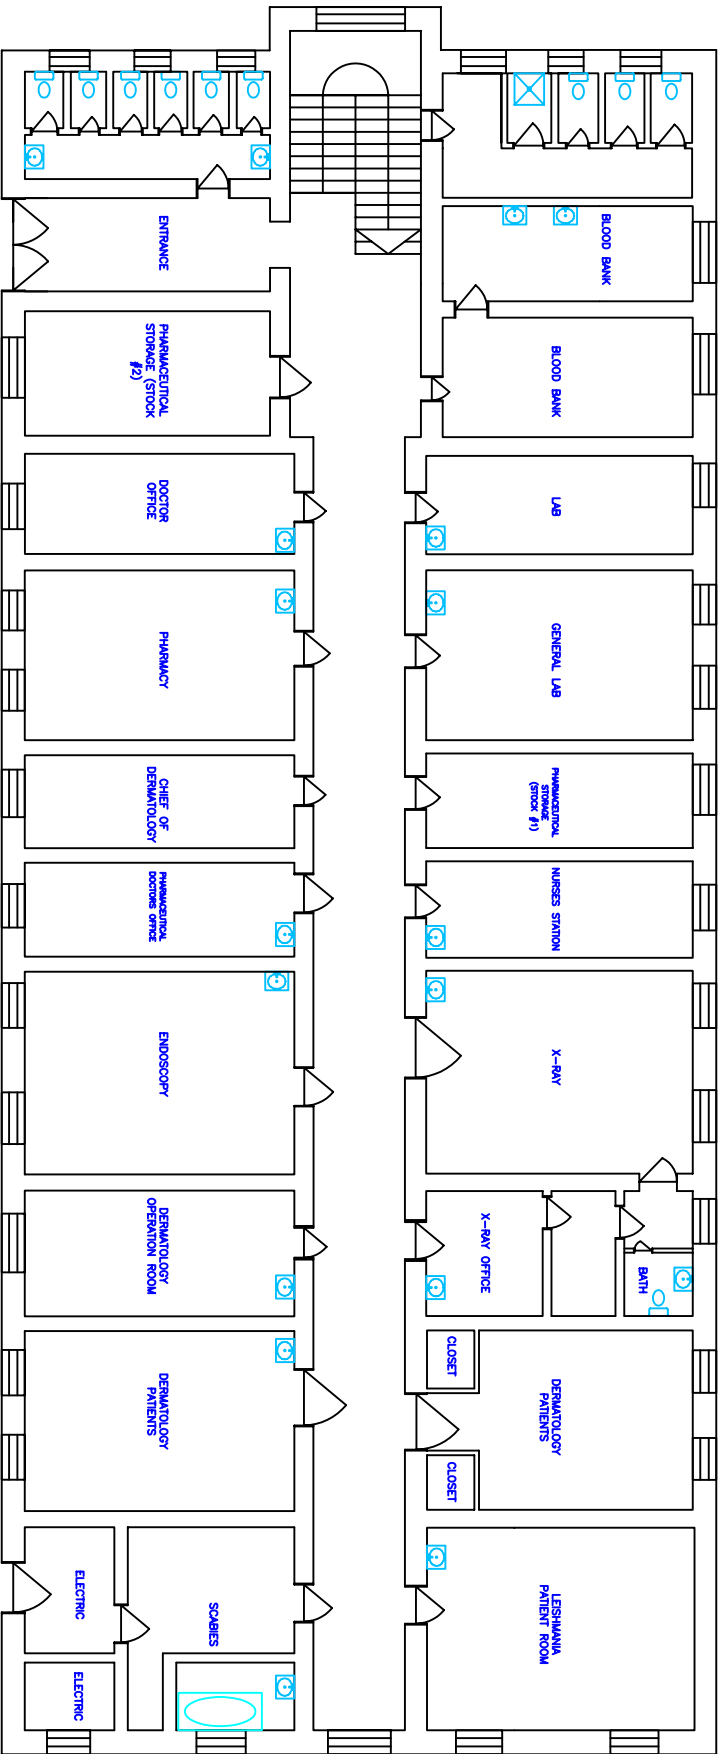

BUILDING C
FIRST FLOOR

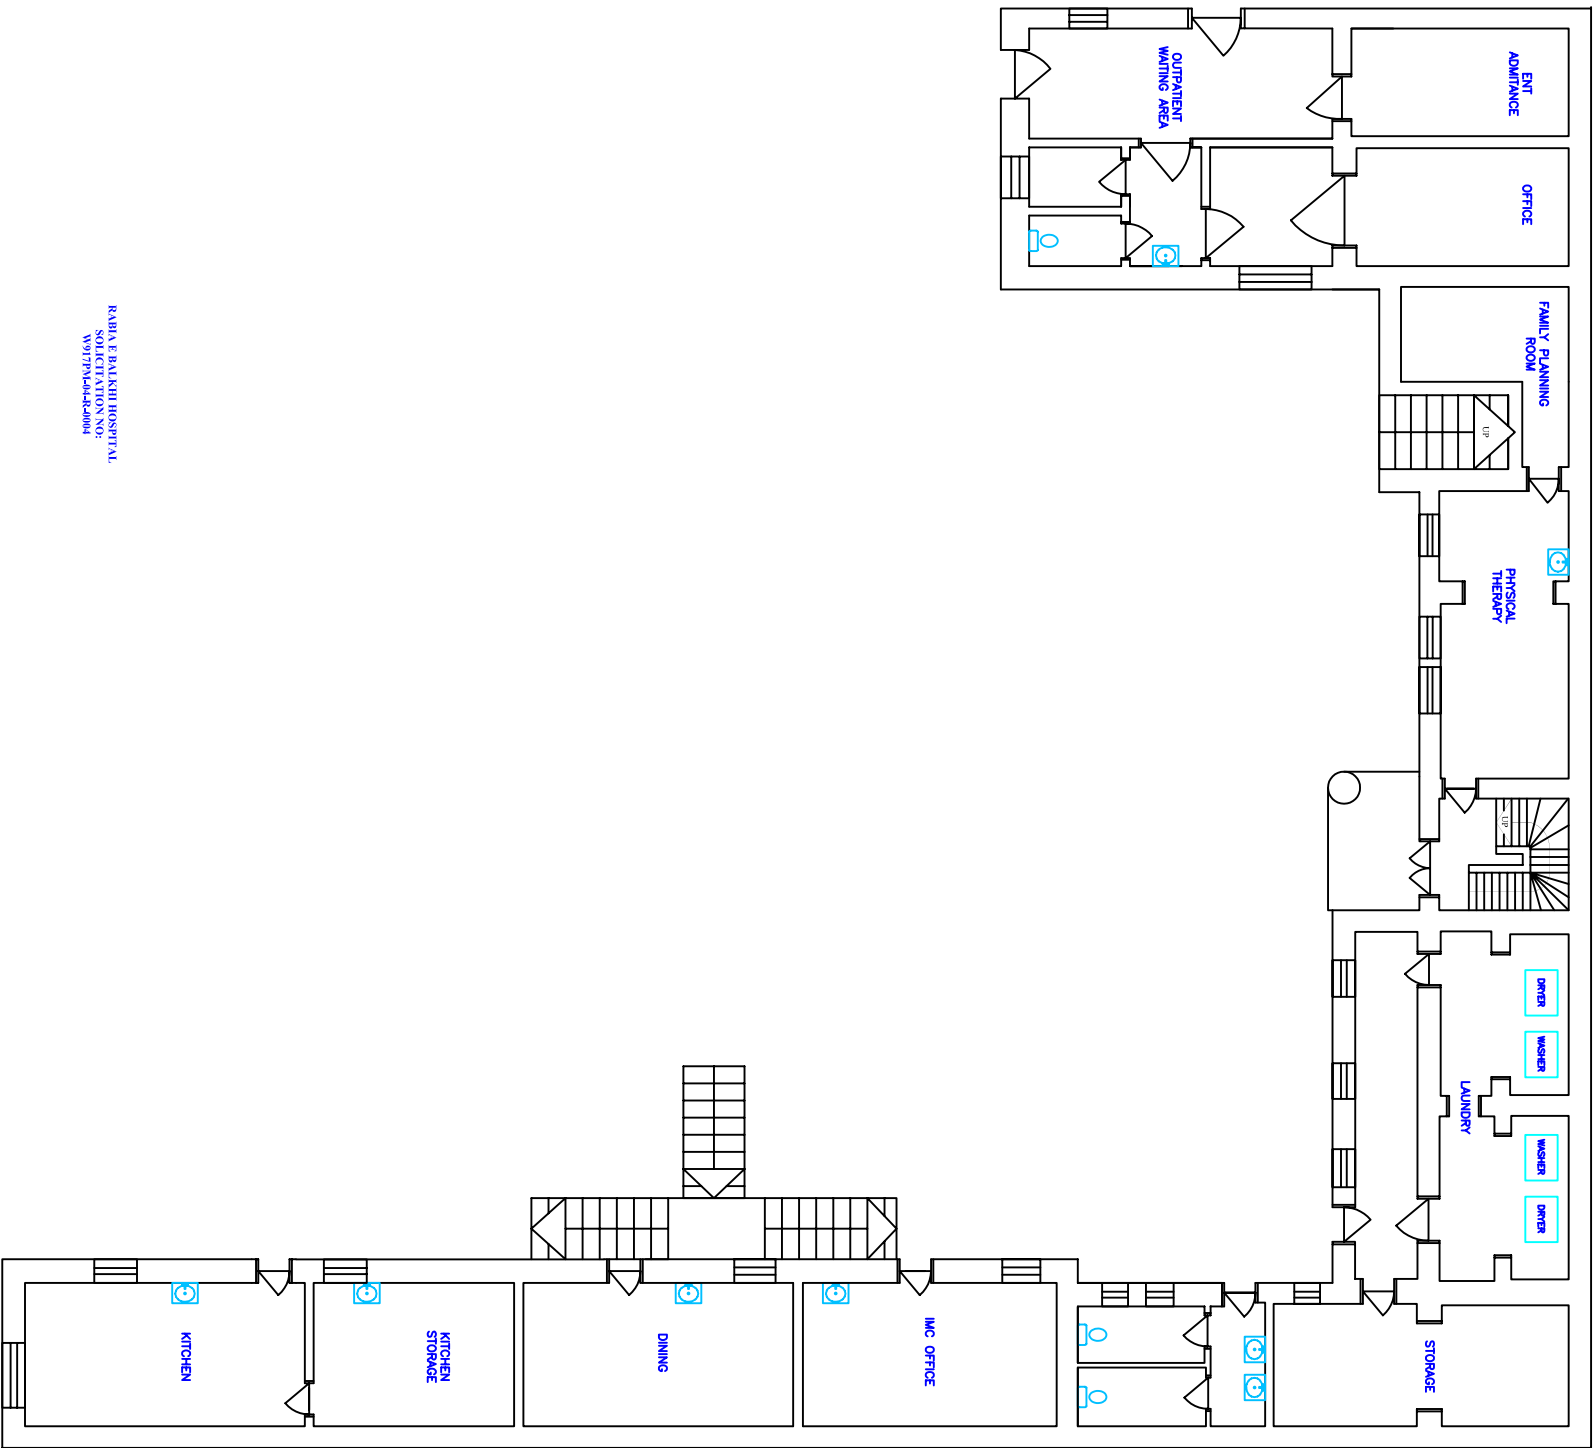

RABIA E BALAKH HOSPITAL
SOLICITATION NO:
W97PM44-004

BUILDING C
SECOND FLOOR

